


# Versi-Panel Enclosures

P R E S E N T S ...

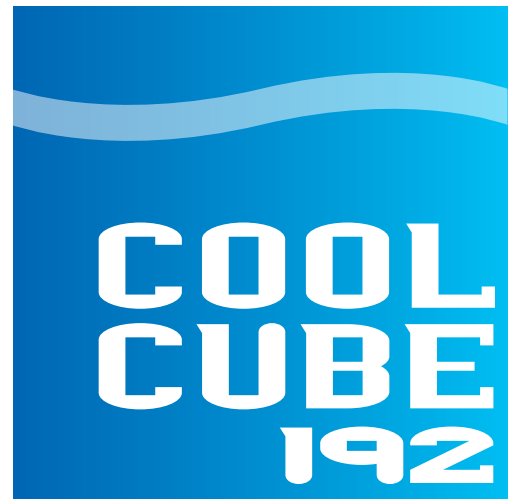

**Box weighs 700 lbs.**

## The First Truly Portable Walk-In Cooler System

### Cool Cube 192 features:

- 192 Cubic feet of on-demand storage
- Perfect for back-up cooling systems
- Provide interim storage in expensive down times
- R-11 walls, floor and roof
- Specially formulated polyurea coating on all exposed surfaces (Similar to truck bed liners)
- Coating FDA approved – durable and stain resistant
- Stainless steel clips
- Formed base eliminates water absorption
- 110 V compressor and condenser unit in a skid pack self seal with evaporator attached skid pack weighs less than 125 pounds
- Sure-Latch prevents accidental lock-in
- Continuous hinge and door panel insure seal and alignment
- Low amp draw, able to run by generator
- Assembled by two people in less than 30 minutes
- Portable, reusable and stackable
- Entire system passed rigid military testing standards
- Expandable in 4' increments – 4' x 8', 8' x 8', 8' x 12', 8' x 16'
- Vinyl roof cover seals edges and compressor/evaporator hole



## The First Truly Portable Walk-In Cooler System

**COOL  
CUBE  
192**



### OUTDOOR CONDENSING UNIT

- Oversized copper aluminum condenser for lower TD in high ambient applications
- Improved air flow design for increased efficiency
- Easy single panel access to all electrical components and refrigeration controls
- All components are UL APPROVED for United States and Canada
- All specifications are based on 95°F ambient
- Standard Unit INCLUDED Accessories:
  - Accumulator and suction line filter*
  - Headmaster control and crank case heater*
  - Liquid line drier and sight glass*
  - Dual pressure control*
  - Complete insulation package*
  - Defrost timer standard on low temperature units*
  - Solenoid valve*
  - Defrost timer*
  - Fan controls — fixed or adjustable*
  - External disconnect switch*
  - Heated receiver tank*

### EVAPORATOR COIL

- Board mounted for easy installation, simply slip through cooler wall and attach pre-located anchor
- Permanently sealed supply lines provide ease access and no re-charge required for multiple set-ups
- PLP models for medium temperature walk-in storage rooms, 115V standard
- PLP-E models for low temperature walk-in freezer applications, 230V standard
- Removable side panel and hinged drain pan for easy servicing
- Drain line exits through mounting board and follows supply lines
- Textured aluminum cabinet
- Aluminum fins and seamless copper tubing
- Thermally protected, permanently lubricated motors
- Low silhouette height of only 13-1/2"
- UL listed